



3068.175 Features

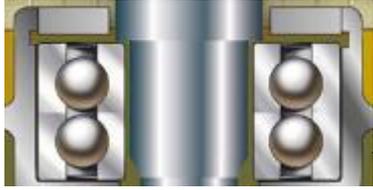


BEARINGS

Double row lower bearings




Griploc™ SEALS

Tandem Mechanical Seal system in oil bath




CUTTING ASSEMBLY

Hard Iron™ cutter wheel & Hardened SS cutting ring

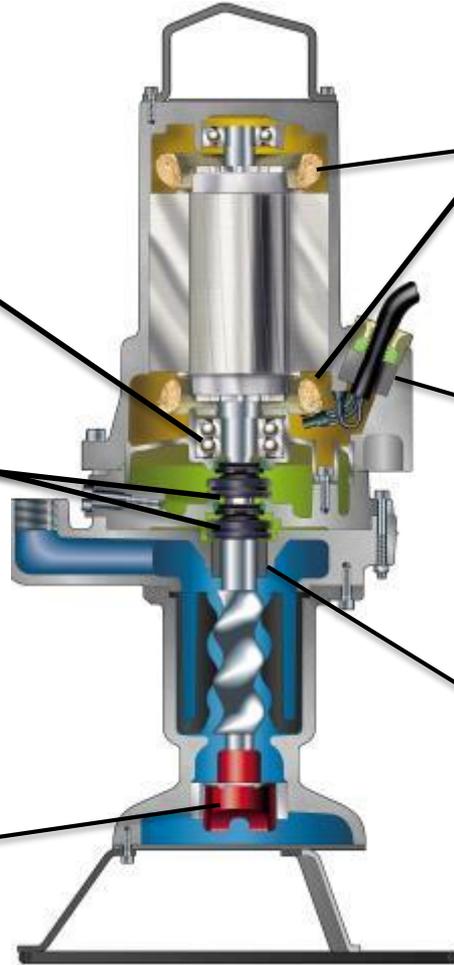


MOTOR

Trickle impregnated windings

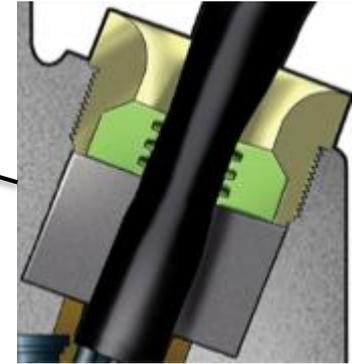

CABLE ENTRY

Strain relief protects the cable connection



SHAFT STABILITY

Bronze sleeve type bearing keeps shaft stationary